


Family	Landmarka
Product	Power Supply OEM Module
Description	Universal DIN rail mounted power supply unit
Part Number	3736.x PSU
Variants	3736.1 PSU 12V 120/240Vac 3736.2 PSU 24V 120/240Vac

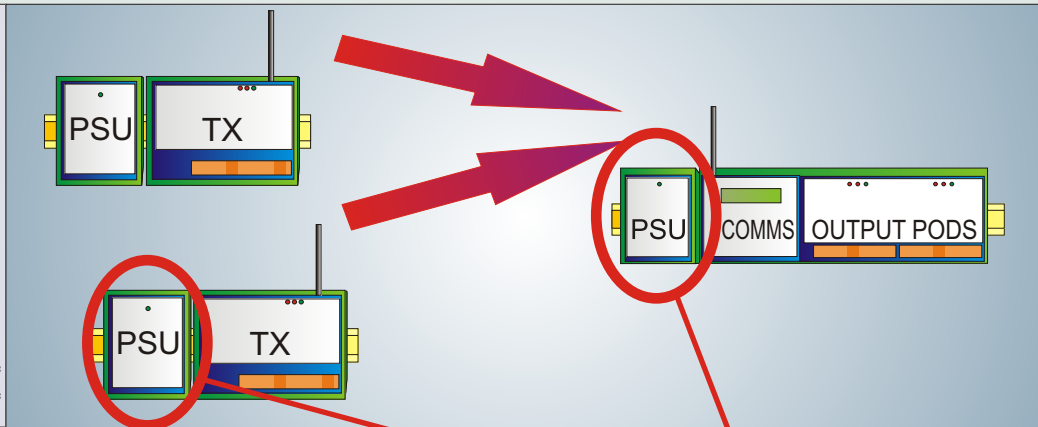

LANDMARKA modules require a D.C. supply. These PSU modules provide a compatible, cost-effective, self-contained Mains A.C. to D.C. conversion.

They are universally applicable to 240VAC or 110VAC supplies at 50 or 60Hz.

PSUs have fixed outputs and can deliver either 12 or 24V D.C.

They can also be used as convenient loop power supplies or for other applications requiring a low-cost no-nonsense DIN rail compatible solution.

All supplies have a green indicator LED to show activity.



Specification

Input:	120V A.C. to 240V A.C.
Output:	3736.1 12V @ 1.25A D.C. 3736.2 24V @ 0.60A D.C.
Indicator LEDs:	Green LED
Fixing:	Clip-on to 'Top-Hat' DIN Rail (EN50022, DIN46277-3, BS5584)
Connection:	D.C. 3.5mm pitch plug-in terminal block (10A rating) A.C. Figure '8' plug. 2m cable supplied with bare ends. Meets DIN57625.

Application & Ordering

<u>Order Code</u>	<u>Application</u>
3736.1	12V 1.25A supply for LANDMARKA Transmitters
3736.2	24V 0.60A supply for LANDMARKA Receivers
3736.2	24V 0.60A supply for additional Isolated Loop Power Supplies

Product Files

